

RING MOUNTS

KEY FEATURES

Low maintenance, easy integration and installation.

Armour shield with various protection levels up to STANAG Level 3.

Fitted 40-50 Soft Mount compatible with LMGs, GPMGs, HMGs and 40mm GMGs.

Electric Drive (eDrive), Mini gun and Twin weapons compatibilities.

Extra optional capabilities available to meet specific requirements.

Cost-effective, lightweight and modular design.


The Platt Ring Mount is a one-man lightweight, low profile and versatile weapon station designed to suit a variety of military vehicles.

Engineered for adaptability, the system can be scaled to meet the evolving demands of modern warfare. Proven in the most challenging operational environments, Platt Ring Mounts deliver exceptional reliability and performance.

The current portfolio includes the MR, FW, and TD series, capable of mounting various weapon platforms. With a legacy of providing combat-proven solutions, W&E Platt is a trusted partner to armed forces worldwide.




Image Credit: MOD PO(Phot) Andrew Linnett Open Government Licence version 1.0 (OGL v1.0).

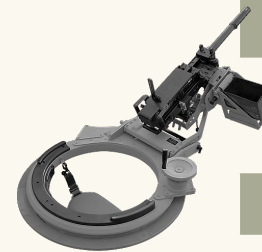


FW SERIES

APERTURE	MASS	WEAPONS	PROTECTION
Ø 550 mm Ø 655 mm Ø 800 mm	~125kg (Accessories dependant).	Various Weapon Capabilities (see 40-50 Soft Mount).	Unprotected.
ROTATION	ELEVATION DEPRESSION	MODULARITY	OPTIONS
360° continuous via direct drive Gearbox.	+60°/-30° (Weapon dependant).	Functionality Scalability Customisation	Various extra capabilities available on specifications.

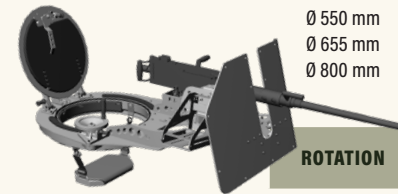

TD SERIES

APERTURE	MASS	WEAPONS	PROTECTION
Ø 550 mm Ø 655 mm Ø 800 mm	~165kg (Accessories dependant) (Protection level dependant).	Various Weapon Capabilities (see 40-50 Soft Mount).	Open ring with hatch Optional front shield STANAG Level 1,2.
ROTATION	ELEVATION DEPRESSION	MODULARITY	OPTIONS
360° continuous via direct drive Gearbox.	+60°/-30° (Weapon dependant).	Functionality Scalability Customisation	Various extra capabilities available on specifications.

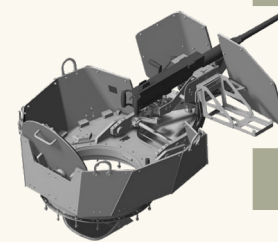

MR SERIES

APERTURE	MASS	WEAPONS	PROTECTION
Ø 550 mm Ø 655 mm Ø 800 mm	165kg - 470kg (Accessories dependant) (Protection level dependant).	Various Weapon Capabilities (see 40-50 Soft Mount).	STANAG Level 1, 2, 3.
ROTATION	ELEVATION DEPRESSION	MODULARITY	OPTIONS
360° continuous via direct drive Gearbox.	+60°/-30° (Weapon dependant).	Functionality Scalability Customisation	Various extra capabilities available on specifications.


*RING MOUNT RANGE CUSTOMER CUSTOMISATIONS UPON REQUEST

BATTLE TESTED WITH COALITION IN IRAQ & AFGHANISTAN

MR SERIES WITH MINI GUN

KEY FEATURES

- Low profile, lightweight, and reliable.
- Modular design with scalable armor (up to STANAG Level 3).
- Optimized for Dillon Aero M134D Mini gun.
- Integrated NATO G3 cone.

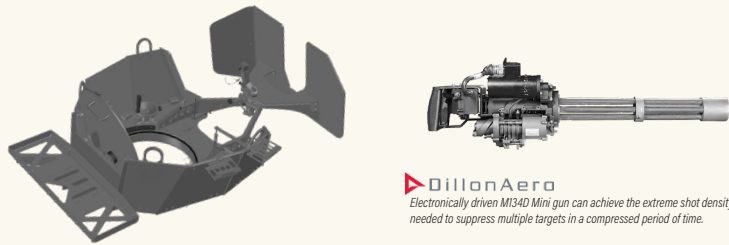

DillonAero
Electrically driven M134D Mini gun can achieve the extreme shot density needed to suppress multiple targets in a compressed period of time.

TECHNICAL SPECIFICATIONS

Ammunition Tray Capacity:	3000 rounds.
Elevation/Depression:	+60°/-20°
Weapon Traverse:	360°
Mass:	250kg (STANAG Level 1).

MR660 MOD1 BASE MODEL

KEY FEATURES

- Armored STANAG Level 1 protection.
- Manually rotated with robust 7.62mm weapon cradle.
- Cost-effective, lightweight, and modular design.
- An optional STANAG Level 1 shield kit.



TECHNICAL SPECIFICATIONS

Weapons Compatibility:	MAG58/M240; Minimi/249 (default) MG3/4/5, M60 and PKM.
Elevation/Depression:	+60°/-20°
Weapon Traverse:	360° (rotation stop can be added).
Mass:	~98kg (STANAG Level 1).

